


SP3T Switch Model 4604A Data Sheet



GENERAL DESCRIPTION

SP3T WR-90 HH is a PIN diode switch that combines low loss and high isolation performance with an integral TTL driver, in one compact package.

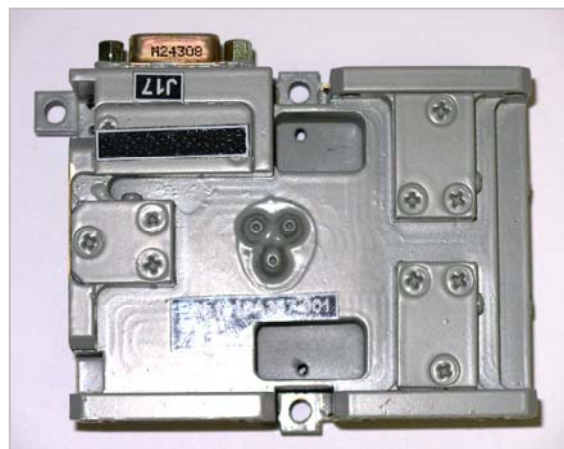

GENERAL SPECIFICATIONS

Frequency Range	X Band
VSWR	1.5 1 max
Insertion Loss	0.6 dB typ
Isolation	28 dB typ
Operating Power	3 W max average power, 35 W max peak power
Switching Time	150 nsec max
Power Requirements	+5 VDC/150 mA max, -15 VDC/30 mA max
Operating Temperature	-54° C to 85° C
Weight	260 g max
Dimensions	90 X 65.5 X 34 (mm)

Note: Specifications are subject to change without notice.

MicroKim

3 Ha'Yozma St.
P.O. Box 2023
Tirat Carmel, 39120
Israel

Tel: +972 (0)4 857-7490
Fax: +972 (0)4 858-0534
Email: marketing@microkim.com
Website: www.microkim.com